



2021-09

PITBULL

Compact Loader X-Series



The most powerful, compact and safest of its kind.

The Pitbull Compact Loader is a unique product with extra attention for safety, quality and power. It's a compact and very versatile machine - perfect for big jobs in small areas.

PITBULL

► P-Z boom

Due to the unique construction of the boom with a combination of P- and Z-kinematics the boom has a high breakout force and optimum parallel guidance.

► Rocking axle

The rigid pivoting point in combination with the swiveling rear axle make the Pitbull very stable and suitable for working on uneven surfaces.

► Axles

The very strong 12.000 kg Dana Spicer axles are able to carry over 3 times the weight of the Pitbull. This provides maximum capacity and an extended lifetime of the axles.

► Motor

The 4 cylinder Kubota V1505 motor is the heart of the Pitbull. Standard this engine provides 36 HP, the turbo version even provides 45 HP.


X SERIES

- Extremely suitable for working in old stables or when low areas have to be passed.
- Extremely suitable for work where safety is guaranteed.
- Also perfectly suitable for gardeners, road construction or other labours where a mini-loader is needed.
- Due to its compact and light weight design the Pitbull is extremely suitable to be used at any location.
- The low weight of the machine makes sure there are no limitations on transport of the machine.
- Available in many different colours.
- Always with 4-point safety roof and telescopic safety brackets.
- Easy to use and very accessible, also for maintenance.
- Only A-components from known brands are used, Kubota, Dana Spicer and Linde, this guarantees A quality.



STANDARD EQUIPMENT

- ▶ 12.000 kg Dana Spicer axles with 45 % differential blocking on the front and rear axle
- ▶ X Series - 36: Drive motor with fixed stroke volume, X Series - 45: Variable drive motor
- ▶ Cardan shaft with disc brake
- ▶ Hydrostatic transmission
- ▶ 450 Bar Linde high-pressured system
- ▶ Working hydraulics: max. 50 l/min
- ▶ Hydraulic quick-change
- ▶ IBT cooler
- ▶ ROPS/FOPS safety roof
- ▶ Trelleborg 400/50-15 T463 tyres
- ▶ Painted in Pitbull red, chassis in Pitbull grey

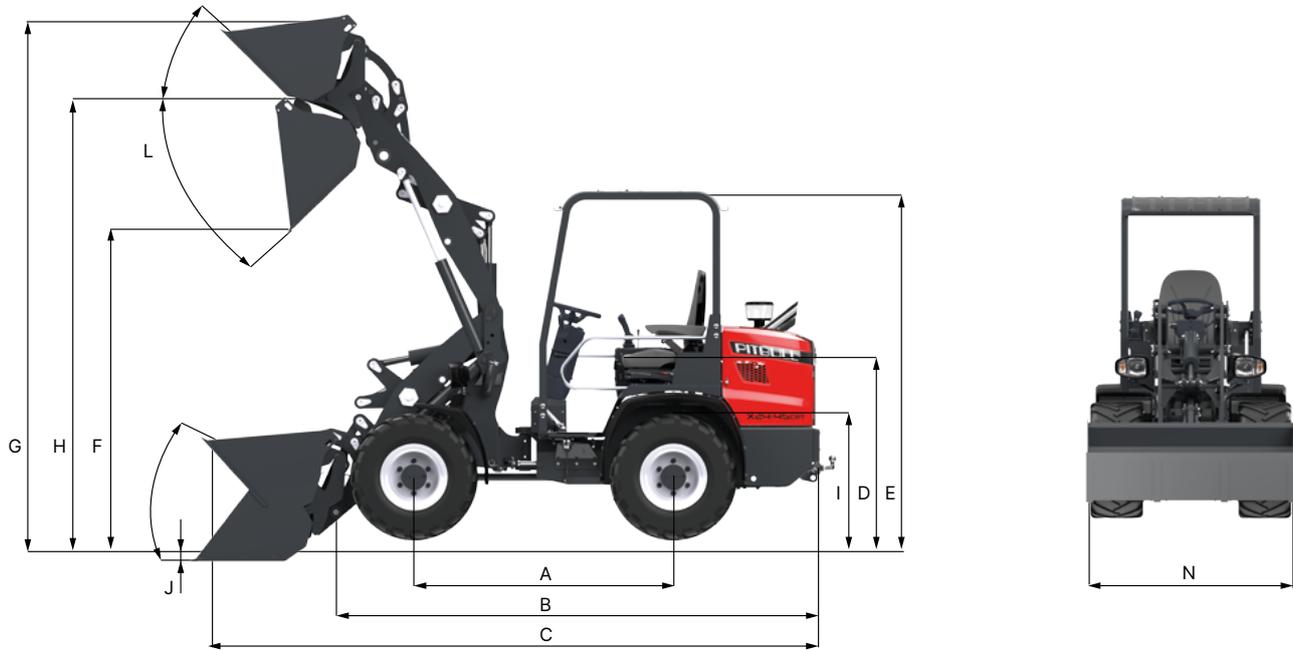

Type	A	B	C	D	E	F	G	H	I	J	K	L	M	N	Weight	Lifting capacity	Outer radius (without bucket)
Weight x 100kg	mm	mm	mm	°	°	°	mm	kg	kg	mm							
Pitbull X24	1624	3100	3620	1240	2140	2250	3270	2830	800	30	50	38	35	1250/1500	2400	1800	2600
Pitbull X27	1624	3150	3670	1240	2140	2250	3270	2830	800	30	50	38	35	1250/1500	2700	2300	2600
Pitbull X28	1624	3150	3670	1240	2140	2250	3270	2830	800	30	50	38	35	1250/1500	2800	2400	2600



Check our latest price lists for all machine options, available for free at peetersgroup.com/en/pricelists-download